



CONSULTANCY REPORT FOR RIEDEL
AND BYRNE
LEVUKA HARBOUR
(Current Measurements and Water
Quality Analysis)

INR ENVIRONMENTAL STUDIES REPORT NO. C42

INSTITUTE OF NATURAL RESOURCES
UNIVERSITY OF THE SOUTH PACIFIC

REPORT



CONSULTANCY REPORT FOR RIEDEL AND BYRNE

LEVUKA HARBOUR

(Current Measurements and Water Quality Analysis)

INR ENVIRONMENTAL STUDIES REPORT NO. C42

Consultants . Institute of Natural Resources

C R Lloyd
William Peter

October, 1989

C O N T E N T S

| | | Page No. |
|-----|---------------------------------|----------|
| 1.0 | Introduction | 1 |
| 2.0 | Measurement Method | 2 |
| | 2.1 Coliform Counts | 2 |
| | 2.2 Current Measurements | 2 |
| 3.0 | Results | 7 |
| | 3.1 Coliform Counts | 7 |
| | 3.2 Current Measurements | 7 |
| | 3.3 Current Meter Results | 7 |
| 4.0 | Conclusions | 8 |
| | Appendix A | |
| | Specifications Zobell bottle | |
| | Current Meter | |
| | Appendix B | |
| | Drougue paths | |
| | Appendix C | |
| | Tide tables | |

1.0 Introduction

The following report outlines work done in Levuka harbour, Fiji for Riedel and Byrne by the Institute of Natural Resources (INR) during the month of August and September 1989.

Riedel and Byrne, (Consulting Engineers, Melbourne, Australia) were contracted by the Australian International Development Assistance Bureau to design a major extension to the existing PAFCO cannery at Levuka. As part of the extensions there was a requirement to provide clean salt water for thawing fish and to provide an outfall for mainly liquid wastes to sea. For the design to take place information was needed about the existing water quality and offshore current movements.

The intake water is required to meet requirements set by the Canadian "Good Manufacturing Practices" handbook for canned tuna processing. These requirements give a limit on the water used for thawing to contain less than 2 coliform bacteria per 100 millilitres; as determined by DFO Standard Procedures for Bacteriological Analysis for water.

The outlet water would be mainly the return water from the thawing process but may also contain some effluent from the cannery processing and fish meal production. The requirements for the outfall are

- i) it must be far enough offshore not to attract sharks to the town beach
- ii) it must not cause nutrients to accumulate along the shore
- iii) it must not contaminate the intake waters.

To determine the intake water quality INR was contacted to obtain coliform counts on water samples at selected sites in the harbour area. To determine the positions of the intake and outfalls INR was contracted to determine the current flows in the harbour area. The location for the current flow studies is given in Map 1 and the water sampling sites in Map 2. Map 3 is a hydrographic map of the area. The tidal flows were initially to be taken by drouque measurements but they were supplemented by current meter measurements on the final trip.

Levuka (the old capital of Fiji) is the main town on Ovalau, an island off the south east coast of Viti Levu and about 45 km from the present capital Suva. Transport to Levuka is by air (Nausori-Bureta) or by sea (Suva-Levuka or Natovi-Levuka). Because of the sometimes erratic air schedules and connection time delays it was considered essential to do the bacteriological analysis on site.

2.0 Measurement Methods

2.1 Coliform Counts

Three separate trips were made to Levuka in August and in September 1989. Total and faecal coliform counts were taken at 5 selected sites on 7 separate days. The sample dates were : trip 1; 1st August, 2nd August and 3rd August; trip 2; 17th August and 18th August and trip 3, 13th September and 14th September. The seawater samples were taken at average flood and average ebb tides and at the surface and at 1m above the seabed at each location. Maps 4 and 5 gives the actual location of the water sampling sites.

A specially constructed sample bottle was fabricated and tested in Suva harbour to ensure the bacteriological integrity of the samples at depths. Appendix A details the "Zobell" microbiological sampling bottle. The water samples were analysed using the "membrane filtration" technique.

2.2 Current Measurements

During the initial trip to Levuka (starting on 1st August) current measurements were taken with drougues obtained from the Institute of Marine Resources (IMR). Trials held in Laucala Bay, Suva indicated that measurements using bearings taken by a hand held compass were not sufficiently accurate. Thus on the first trip the current speed was measured by letting the drougues drift a set distance on a pre-measured line from an anchored boat. The bearing was taken from the anchored boat to the final drougue position to obtain the current direction. On the second trip (starting on 17th August) the firm of Harrison and Grierson were subcontracted to provide a "total station" measurement facility. By having the "total station" on shore and the reflector on the boat a considerable improvement in accuracy was realized. On the third trip (starting 12th September) an improved drougue design was used in conjunction with a continuous recording current meter.

The IMR drougues had a polystyrene float that protruded somewhat out of the water giving rise to the possibility of wind drag, the improved drougue was trimmed so that virtually no surface wind resistance would result. The improved drougue also had a vane of increased cross sectional area (0.7 m² as against 0.4 m²). Photos 1 and 2 show the improved drougue. The vane was usually set between 3m and 10m below the surface. The current meter used was an Aandera RCM4 manufactured in Norway. The unit was capable of recording current speed, current direction, salinity (conductivity), temperature, and pressure at preset intervals on magnetic recording tape. The pressure

3.

PHOTO 1
FLOAT


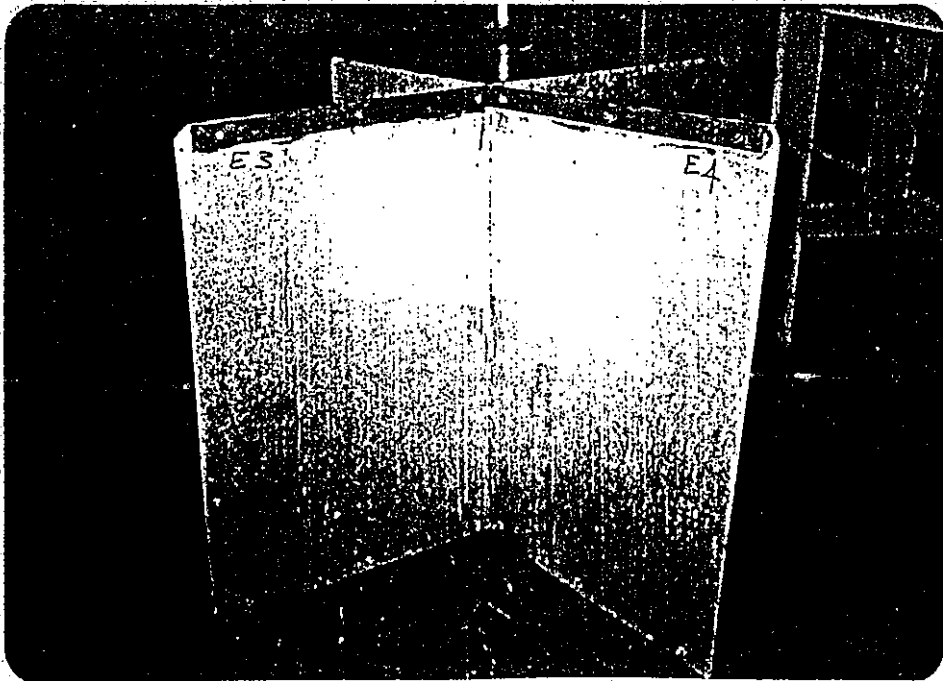



PHOTO 2
VANE




MAP 1

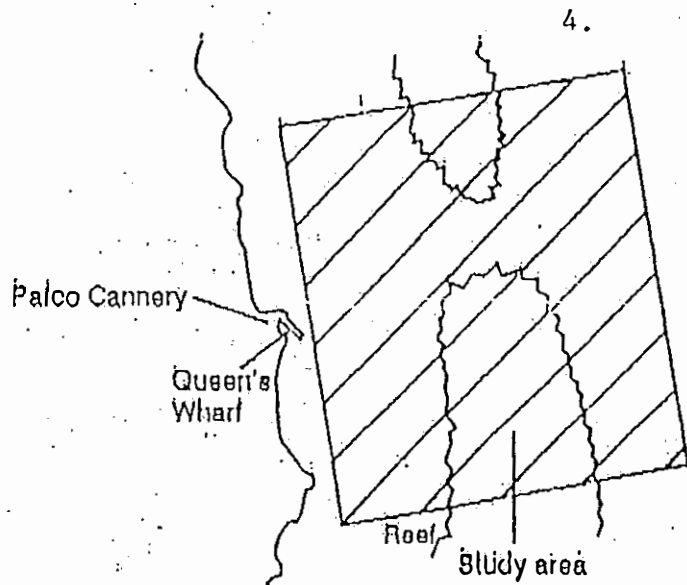

LOCATION FOR TIDAL FLOW STUDY

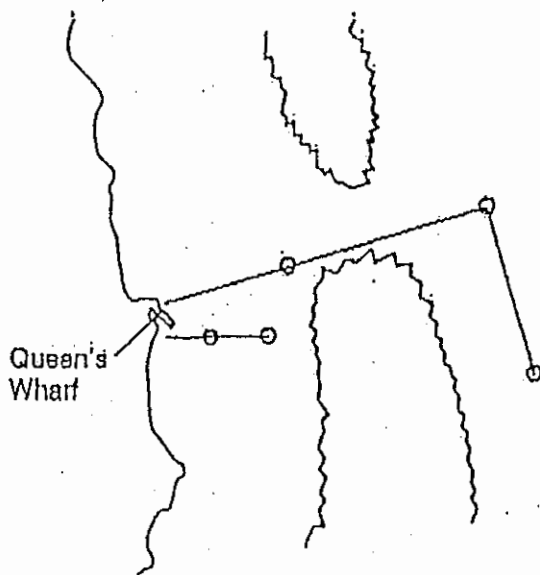

MAP 2



LOCATION OF SAMPLING SITES



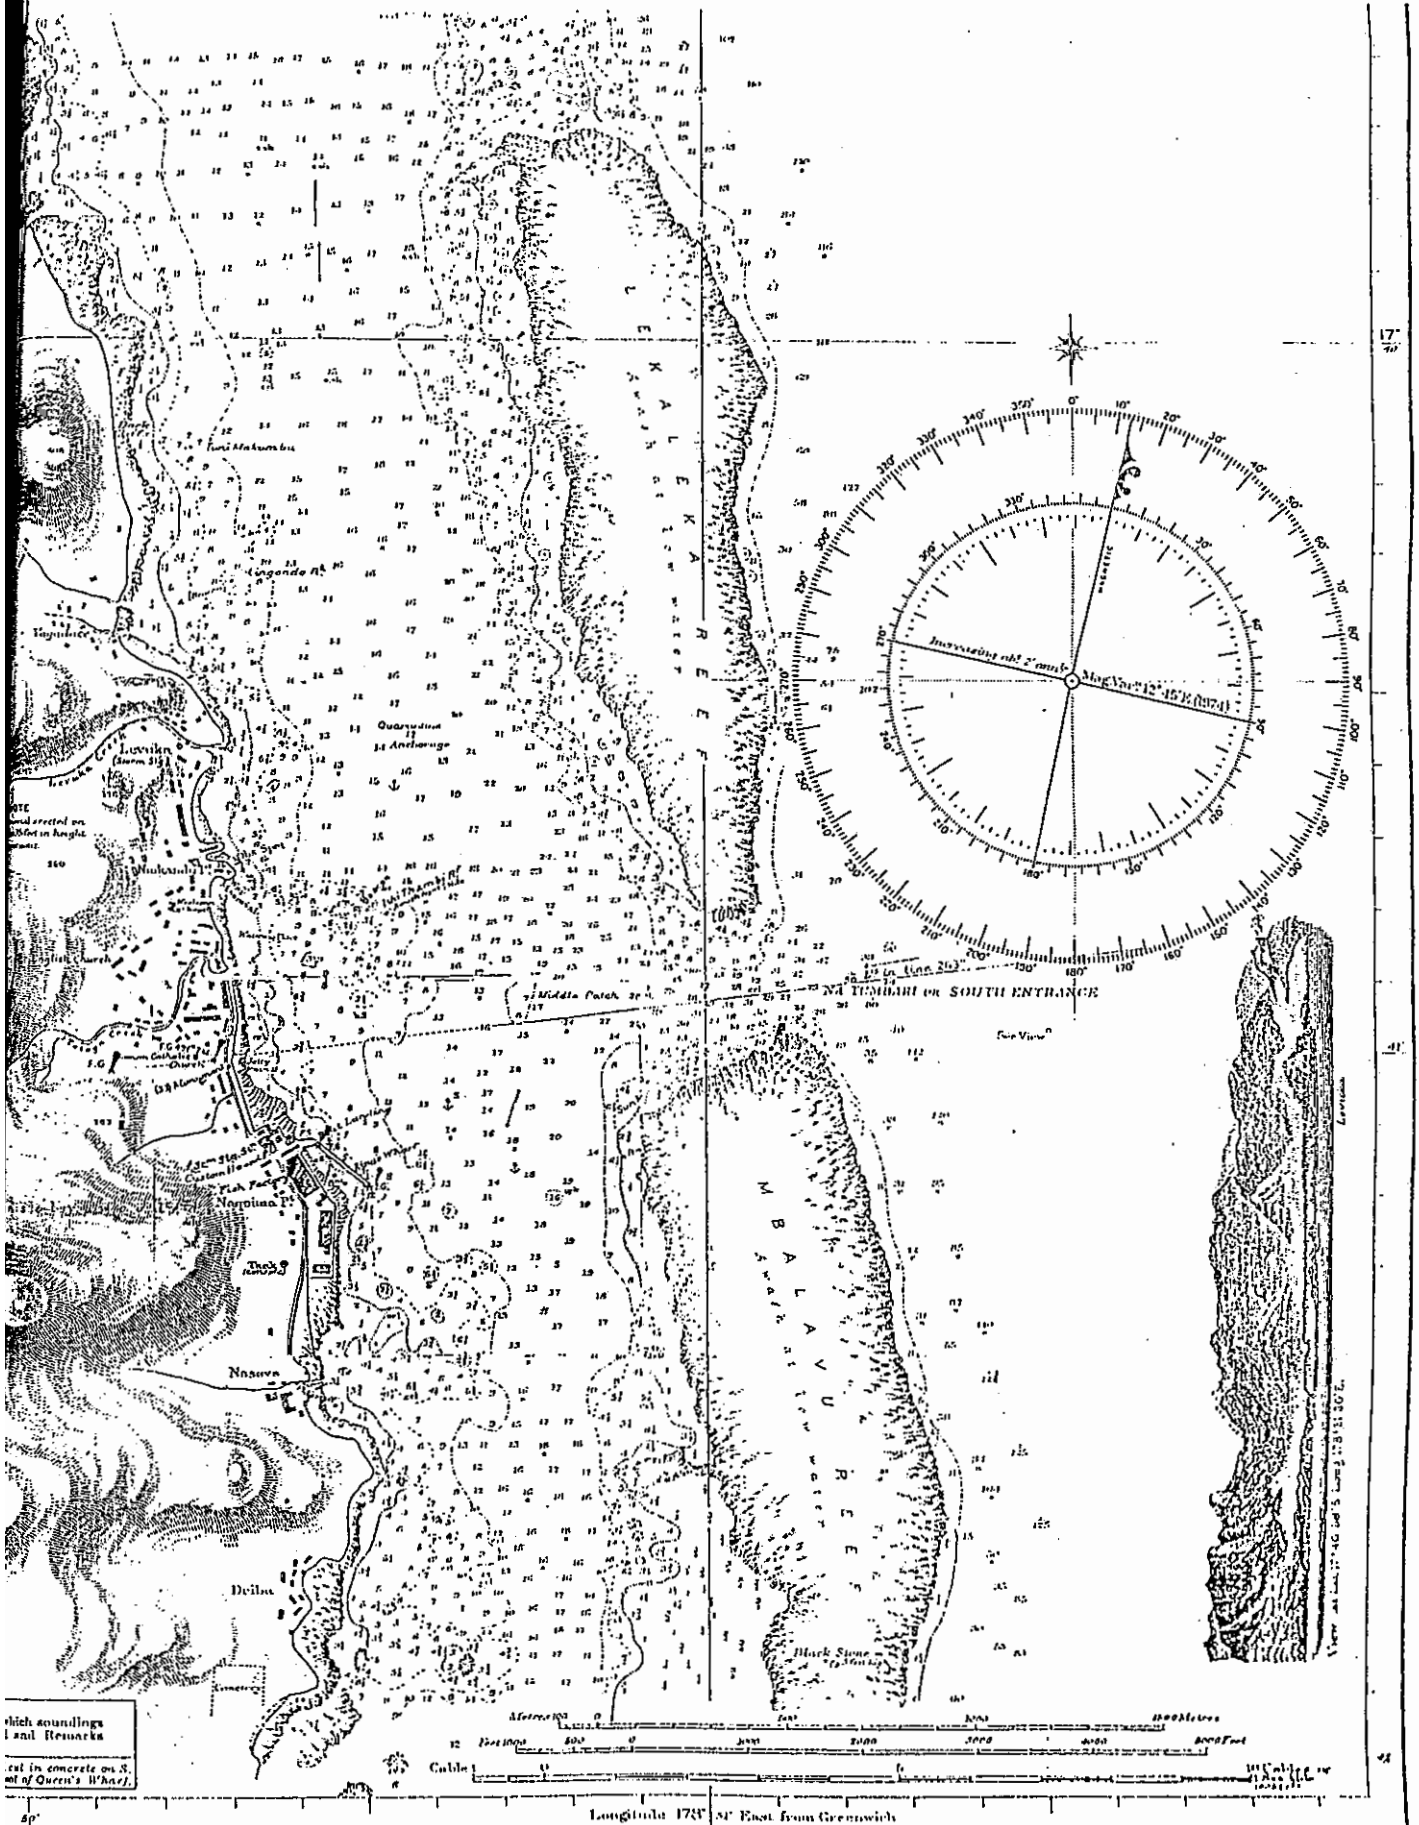


PHOTO 3

AANDERA CURRENT METER IN PLACE

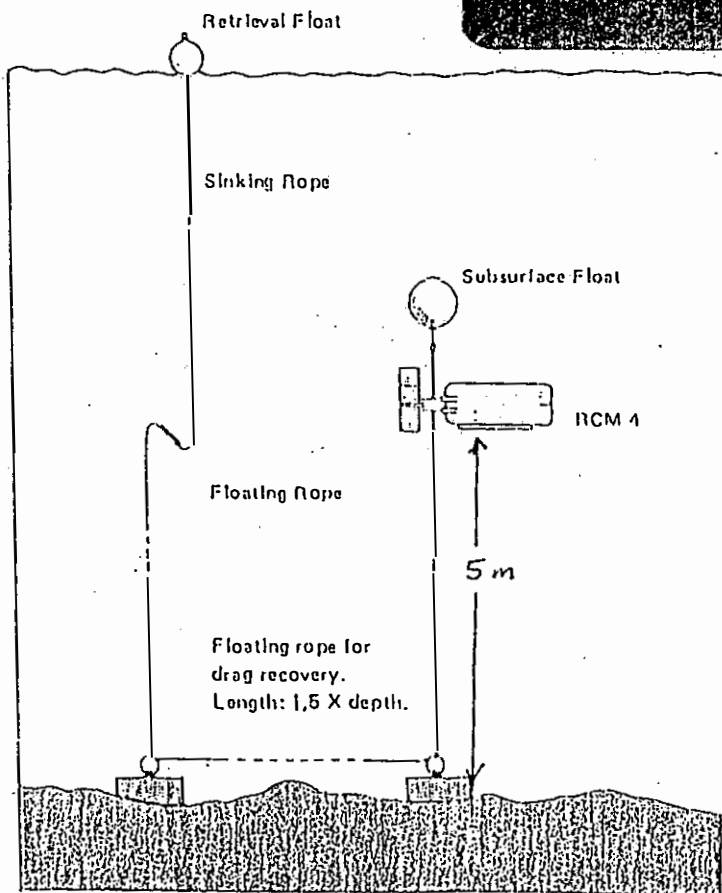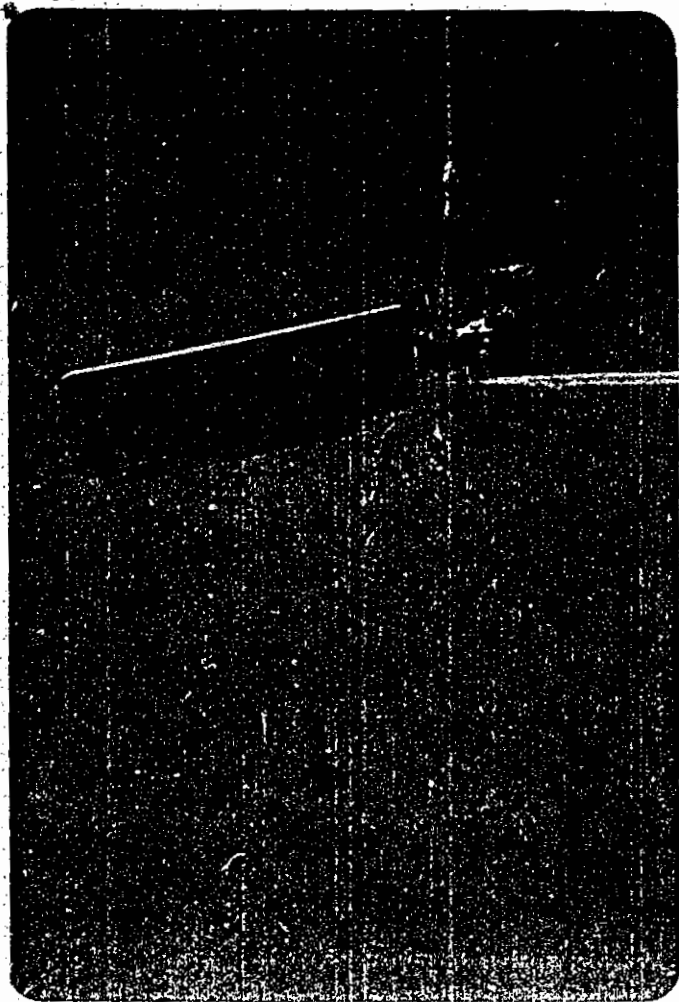

U - Mooring

FIG. 1.01 Moorings of Current Meters
FIGURE 1

7.

measurement capability enabled a check to be made on tide height. All sensors except salinity (conductivity) were calibrated in the INR laboratory before the unit was dispatched to the field. The meter was anchored as per Fig. 1. The distance from the meter to the sea floor was set at 5m. The distance between the two anchors was set at 1.5x the total water depth. Appendix A details the current meter specifications. Measurements were taken at 5 minute intervals. The data was transferred from the magnetic tape via a RS 232 line to a "BBC" microcomputer. This data was then transferred to an IBM compatible computer and analysed on a Lotus 123 spreadsheet.

3.0 Results

3.1 Coliform Counts

The results for trips 1 and 2 are detailed in table 1 and the results for trip 3 in table 2. As can be seen no site gave samples that had <2 counts/100 ml on all sampling days.

3.2 Current Measurements

Table 3 and Map 4 gives the results for trip 1. The results for trip 2 and trip 3 are given in Appendix B. The results for the 3 trips include 5 days of measurements. During trips 1 and 2 the wind speed was quite high, around 10 m/s from the south. The results from trip 3, in virtually calm conditions and with the improved drougue design are thought to be the most reliable. Appendix C gives the tide tables for the months of August and September 1989.

3.3 Current Meter Results

The Aandera current meter was installed at two locations (site C3 and site B3) for periods of 24 hours each. The recording time interval was set to 5 minutes. Maps 5 and 6 show the two locations. Site C3 was located in the reef gap in water of depth 15 m. Figures 2 to 5 give the results for site C3. The water at site C3 was very clear with the meter being visible 10 m from the surface. The measurements were entirely as expected with an inward flow [260° N(mag)] peaking at 30 cm/sec just after low tide (flood tide) and an outward flow (100° to magnetic North) peaking at 24 cm/sec just after high tide (ebb tide). The magnitudes of the flows agree well with the drougue results.

Site B was close to shore opposite Nasova. The clarity of the water at site B was very poor with a visibility of only a few metres. The poor visibility necessitated having a diver go down to check the mooring of the current meter at this site. Figures 6 to 9 give the results for site C3.

8.

The measurements showed little to no water movement at this site. Peaks of around 3 cm/sec could be observed for short intervals during the tidal change but for most of the time the flow was less than the detectable limit of 2 cm/sec.

4.0 Conclusions

The measurements indicate that the present levels of coliform bacteria in Levuka Harbour would not enable sea water from inside the reef area to be used directly as thawing water.

Close to the shore there appears to be little horizontal current flow. In the mid areas between the reef and the shore a current flow parallel to the coast towards a Northerly direction predominates. This flow averaged around 10-14 cm/sec and as it was roughly in the same direction as the main prevailing winds may be largely wind driven. Close to the beach reef edge one would expect the main flow to be draining water off the reef driven by wave movement on the front edge. Horizontal current flows between 0 and 30 cm/sec were observed in the passage in the reef. The current flows in the passage reversed as per the tidal movement in an entirely predictable manner. A composite picture showing representative paths for both flood and ebb tides are given in Maps 5 and 6.

TABLE 1
LEVUKA HARBOUR
WATER QUALITY RESULTS

| DATE | TRIP 1 | | | | | | TRIP 2 | | | |
|---------------------------|--------------------|--------------------|----------|--------------------|------------------|-----|--------|-----|-----|-----|
| | 01 AUG | 02 AUG | 03 AUG | 17 AUG | 18 AUG | | | | | |
| SITE | TC | FC | TC | FC | TC | FC | TC | FC | TC | FC |
| A1 Top | 1 | Nil | 174 | Nil | Nil | Nil | Nil | Nil | 26 | 9 |
| A1 Bottom | Nil | Nil | >200 | Nil | Nil | Nil | 3 | 3 | 2 | Nil |
| B1 Top | Nil | Nil | 140 | Nil | Nil | Nil | 3 | Nil | Nil | Nil |
| B1 Bottom | Nil | Nil | Nil | Nil | Nil | Nil | 36 | Nil | 9 | Nil |
| C1 Top | 10 | 4 | 50 | 1 | Nil | Nil | 7 | 3 | 44 | 4 |
| C1 Bottom | 17 | Nil | 120 | Nil | 8 | 2 | 9 | 5 | 33 | 7 |
| D1 Top | Nil | Nil | >200 | 7 | Nil | Nil | 18 | 1 | 20 | 12 |
| D1 Bottom | Nil | Nil | >200 | Nil | Nil | Nil | 9 | Nil | 21 | Nil |
| E1 Top | Nil | Nil | >200 | 1 | Nil | Nil | *ND | *ND | 9 | 5 |
| E1 Bottom | Nil | Nil | 6 | Nil | Nil | Nil | 16 | 1 | 8 | 2 |
| Tide When Water Collected | Average Flood Tide | Average Flood Tide | Low Tide | Average Flood Tide | Average Ebb Tide | | | | | |

NOTES :

1. a) FC = Faecal Coliform
b) TC = Total Coliform
2. Results reported as counts/100 ml
3. *ND = Not determined (water sample not collected)
4. It must be noted that on the days on which most positive counts were recorded, i.e. 2, 17 and 18 August there was a lot of movement of ships in and out of the Harbour

TABLE 2

TRIP 3 - WATER QUALITY RESULTS


| DATE | 13 Sept | | 14 SEPT | |
|-----------|------------|----|------------|----|
| SITE | TC | FC | TC | FC |
| A3 Top | 370 | 0 | 420 | 1 |
| A3 Bottom | 54 | 0 | 430 | 0 |
| B3 Top | >20,000 | 80 | 2,600 | 42 |
| B3 Bottom | 75 | 0 | >200 | 0 |
| Tide | Flood Tide | | Flood Tide | |

NOTES :


1. a) FC = Faecal Coliform
 b) TC = Total Coliform
2. Results reported as counts/100 ml

TABLE 4
DROUGE SURVEY RESULTS
LEVUKA HARBOUR - 1-3 AUGUST 1989

| Date | Vane Path No. | Vane Depth (m) | Time Released | Time Collected | Distance (m) | Average | | Direction to North | Tide |
|-------|------------------|-------------------|------------------|-------------------|-----------------|--------------------|----------|-----------------------|-------|
| | | | | | | Velocity (m/hr) | cm/s | | |
| 1 Aug | 1 | 3 | 1032 | 1100 | 200 | 429 | 12 | 278° | Ebb |
| | 1 | 10 | 1115 | 1133 | 200 | 667 | 18 | 281° | Ebb |
| | ave. | | | | | | 15 | | |
| | 2 | 10. | 1203 | 1244 | 100 | 146 | 4 | 300° | Low |
| | 2 | 3 | 1252 | 1346 | 100 | 111 | <u>3</u> | 337° | Low |
| | ave. | | | | | | 3.5 | | |
| 1 Aug | 3 | 3 | 1610 | 1640 | 200 | 400 | 11 | 338° | Flood |
| | 3 | 10 | 1648 | 1746 | 200 | 207 | <u>6</u> | 1° | Flood |
| | ave. | | | | | | 8.5 | | |
| | 4 | 10 | 0945 | 0958 | 200 | 923 | 26 | 108° | Ebb |
| 2 Aug | 4 | 3 | 1005 | 1020 | 200 | 800 | 22 | 101° | Ebb |
| | ave. | | | | | | 24 | | |
| 2 Aug | 5 | 10 | 1138 | 1242 | 200 | 188 | 5 | 312° | Ebb |
| | 5 | 3 | 1250 | 1315 | 100 | 240 | <u>7</u> | 281° | Low |
| | ave. | | | | | | 6 | | |
| | 6 | 3 | 1600 | 1643 | 100 | 140 | 4 | 270° | Flood |
| 2 Aug | 6 | 10 | 1648 | 1750 | 100 | 97 | <u>3</u> | 260° | Flood |
| | ave. | | | | | | 3.5 | | |
| 3 Aug | 7 | 10 | 0844 | 0901 | 100 | 353 | 10 | 331° | Ebb |
| | 7 | 3 | 0907 | 0925 | 100 | 333 | <u>9</u> | 323° | Ebb |
| | ave. | | | | | | 9.5 | | |
| | 8 | 3 | 0948 | 1019 | 100 | 194 | 5 | 213° | Ebb |
| 3 Aug | 8 | 10 | 1023 | 1051 | 100 | 214 | <u>6</u> | 241° | Ebb |
| | ave. | | | | | | 5.5 | | |

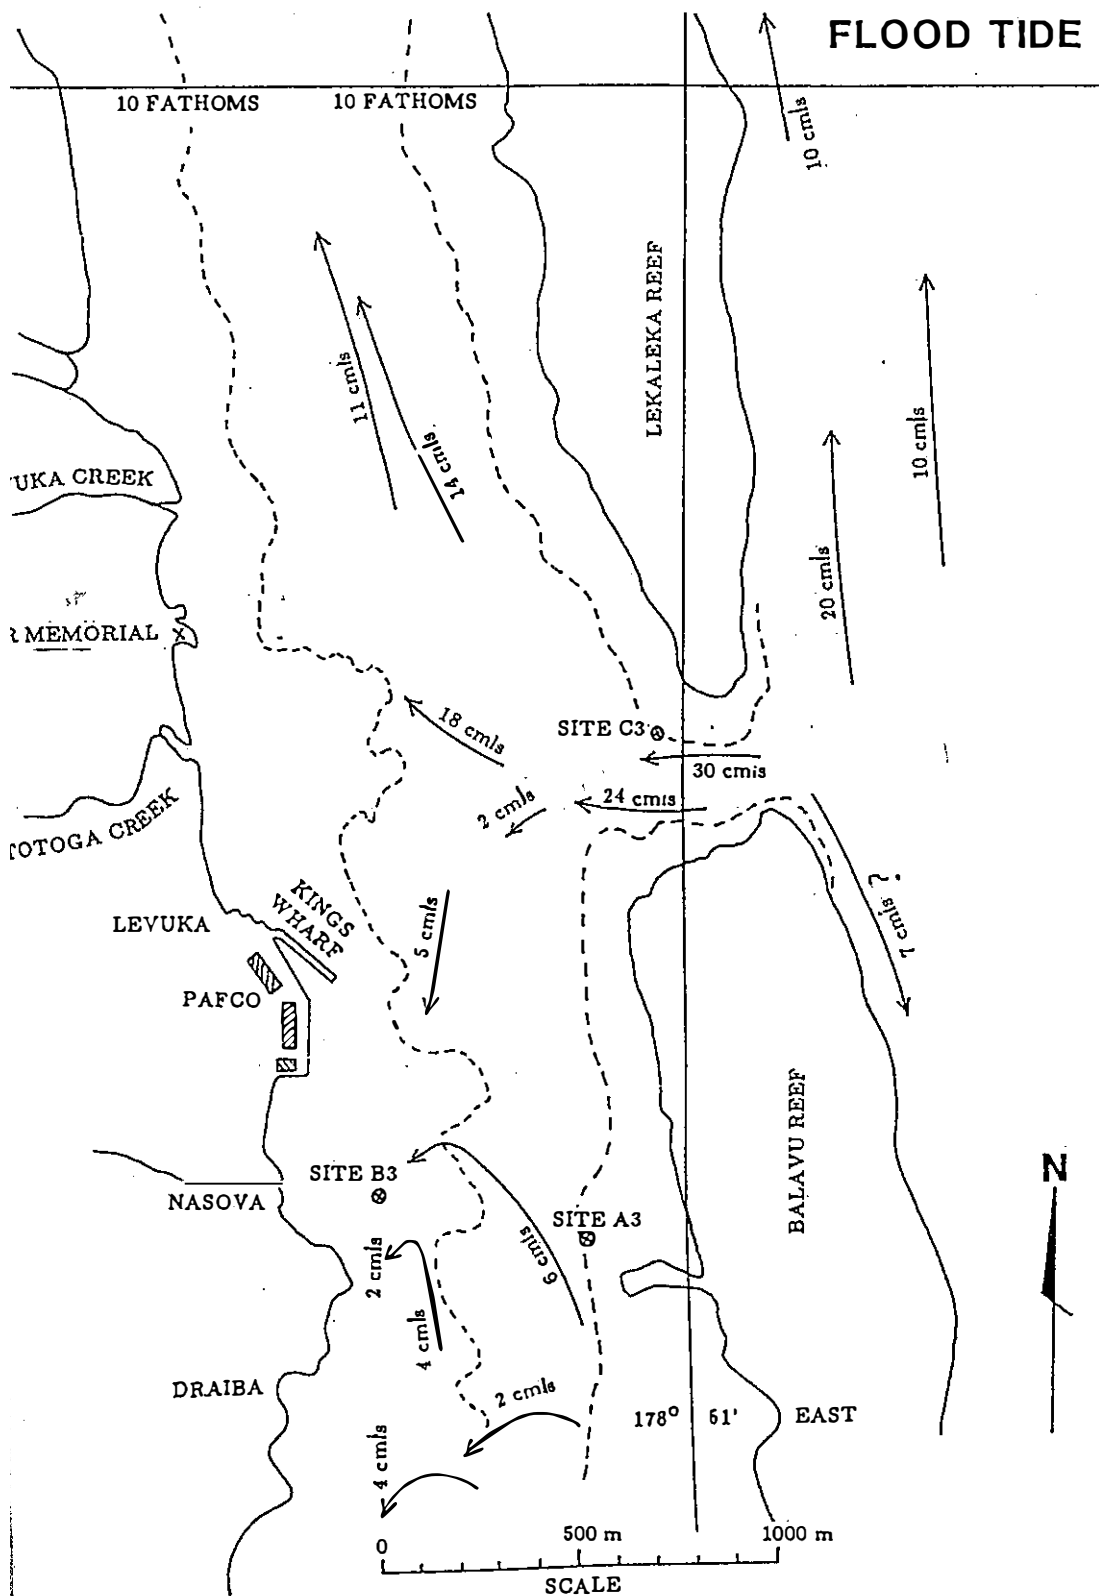

MAP 5

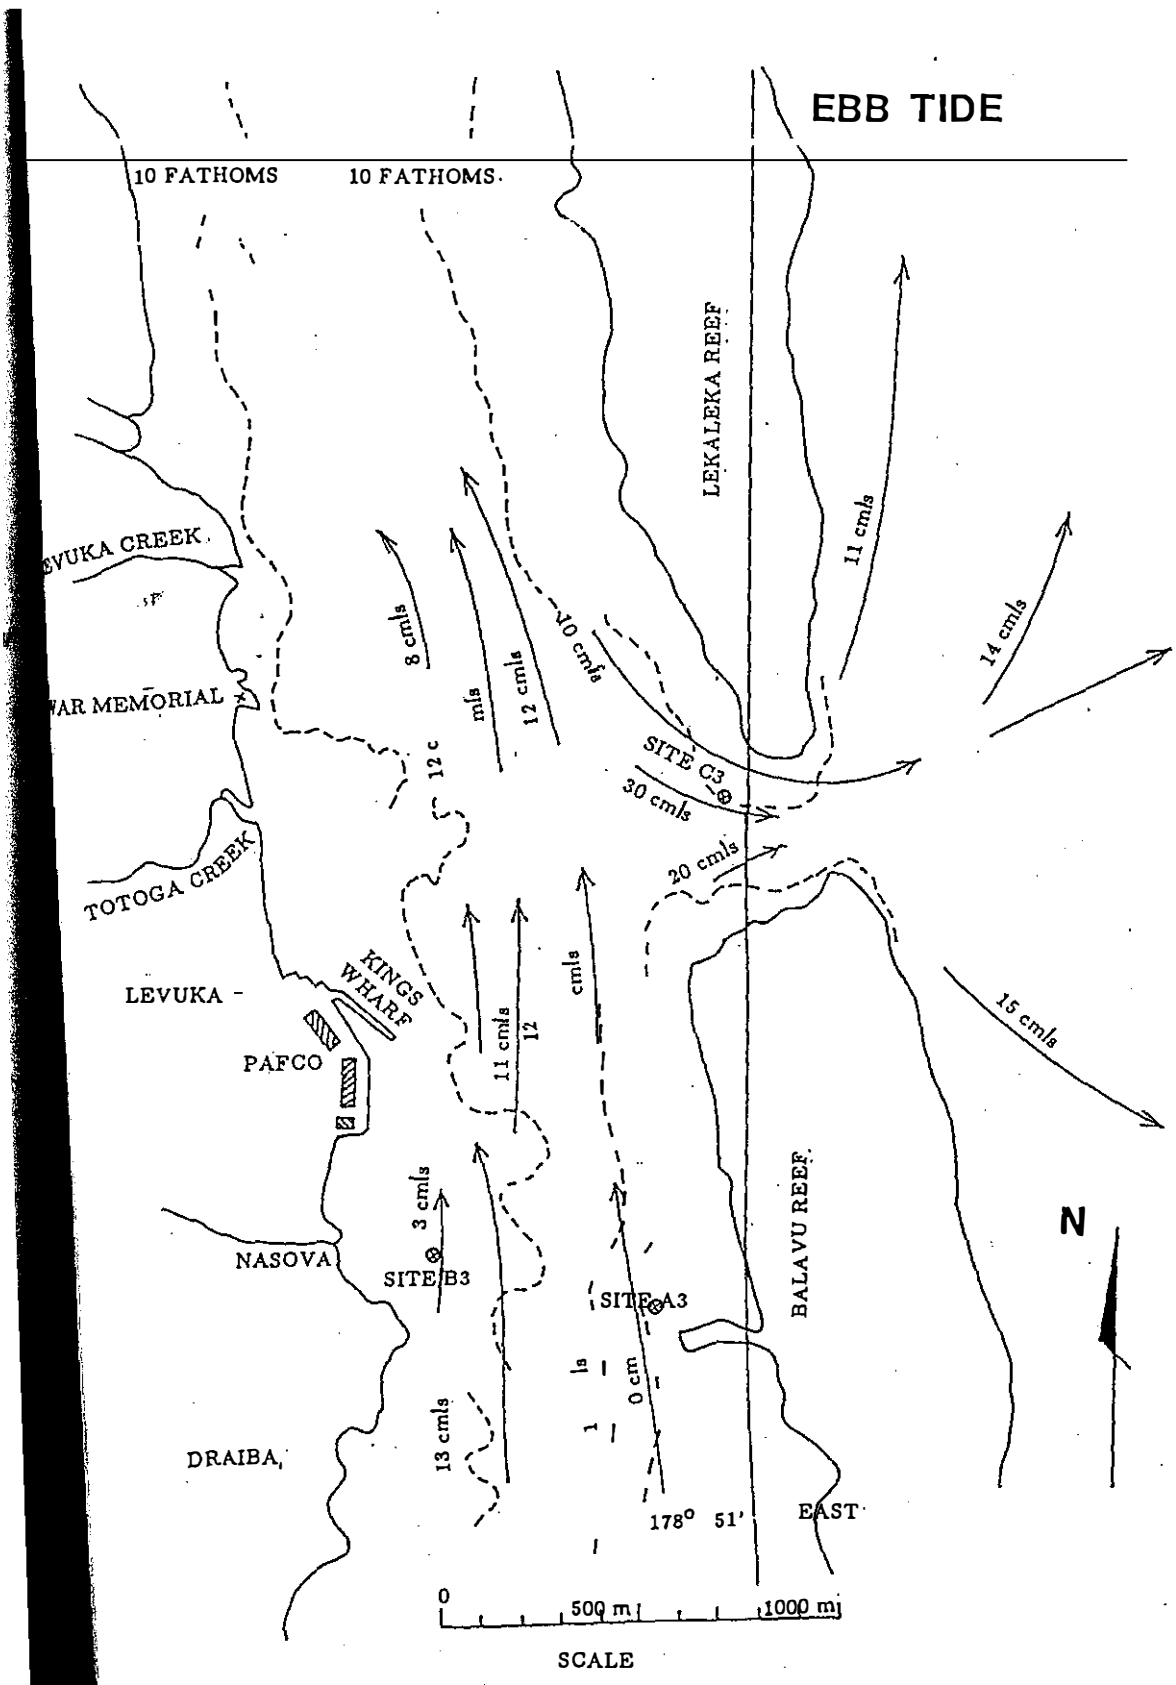

MAP 6

Levuka site C3

tide height

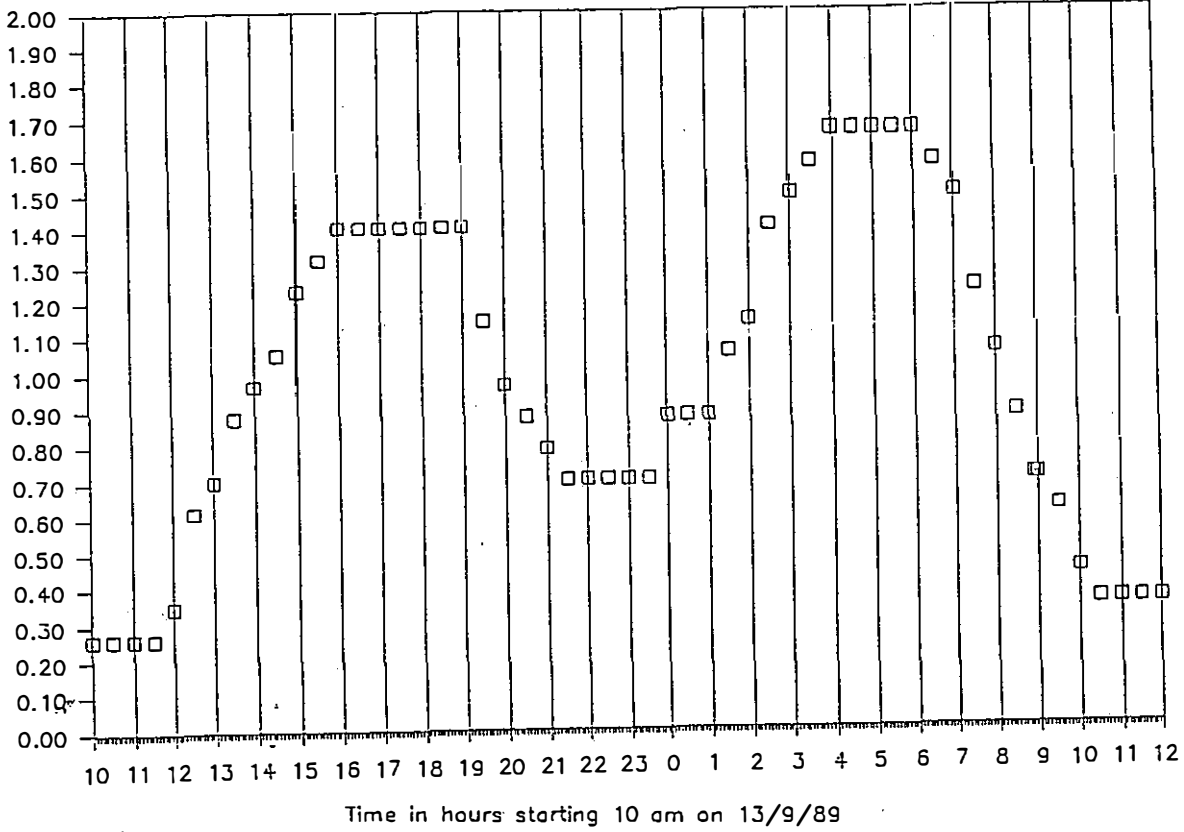


FIGURE 2

Levuka site C3

Current speed

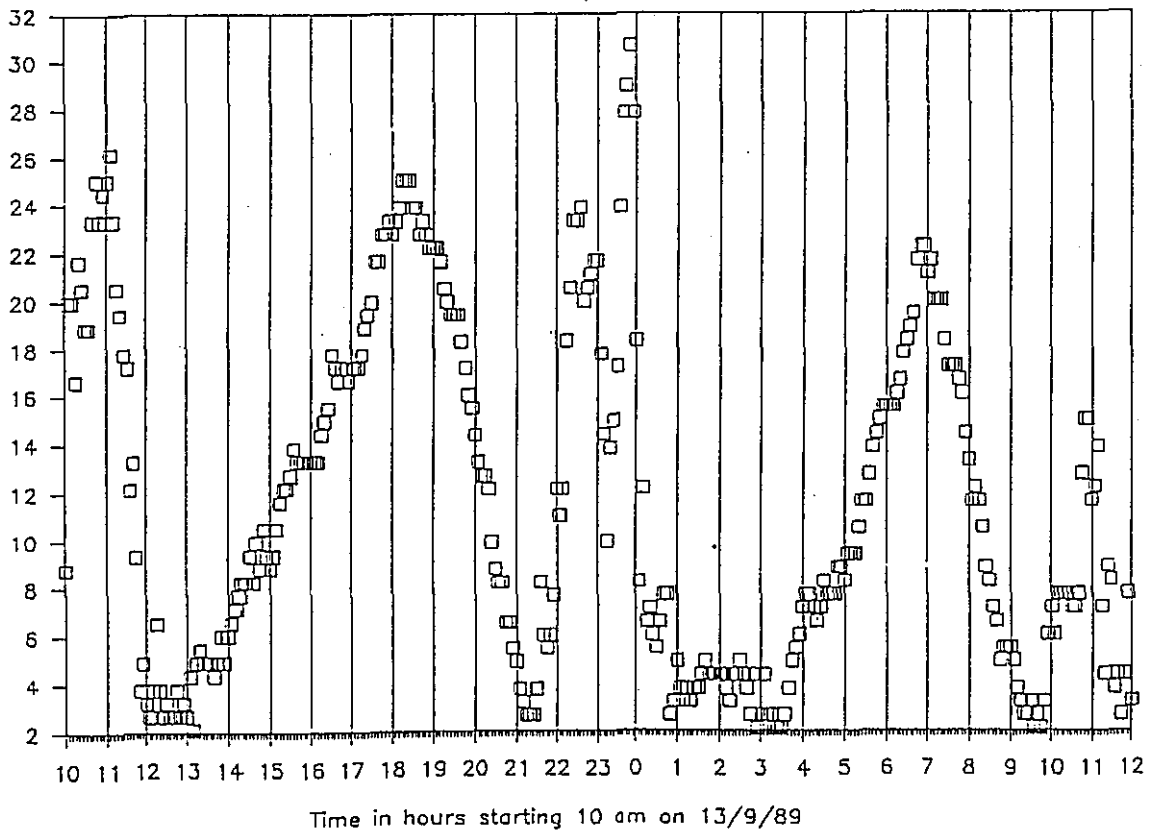


FIGURE 3

Levuka site C3

Current direction

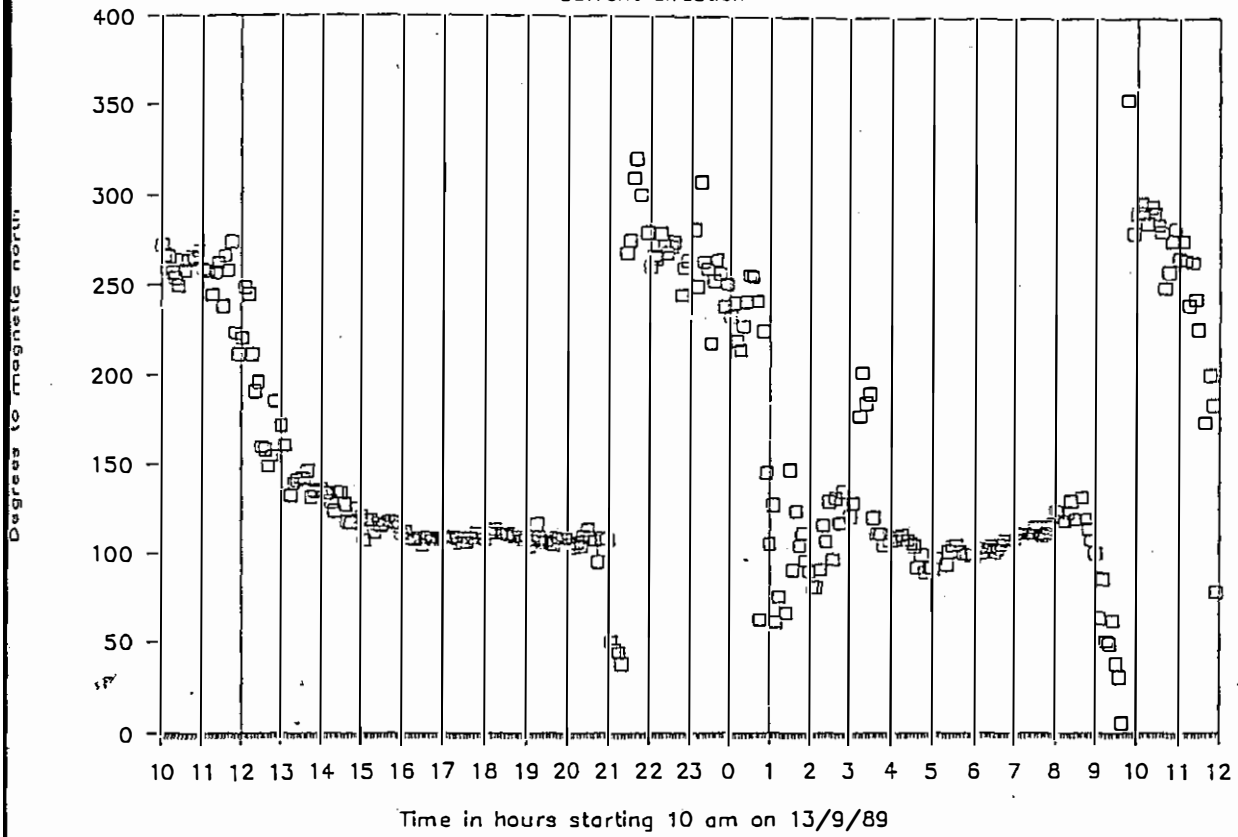


FIGURE 4

Levuka site C3

Water Temperature

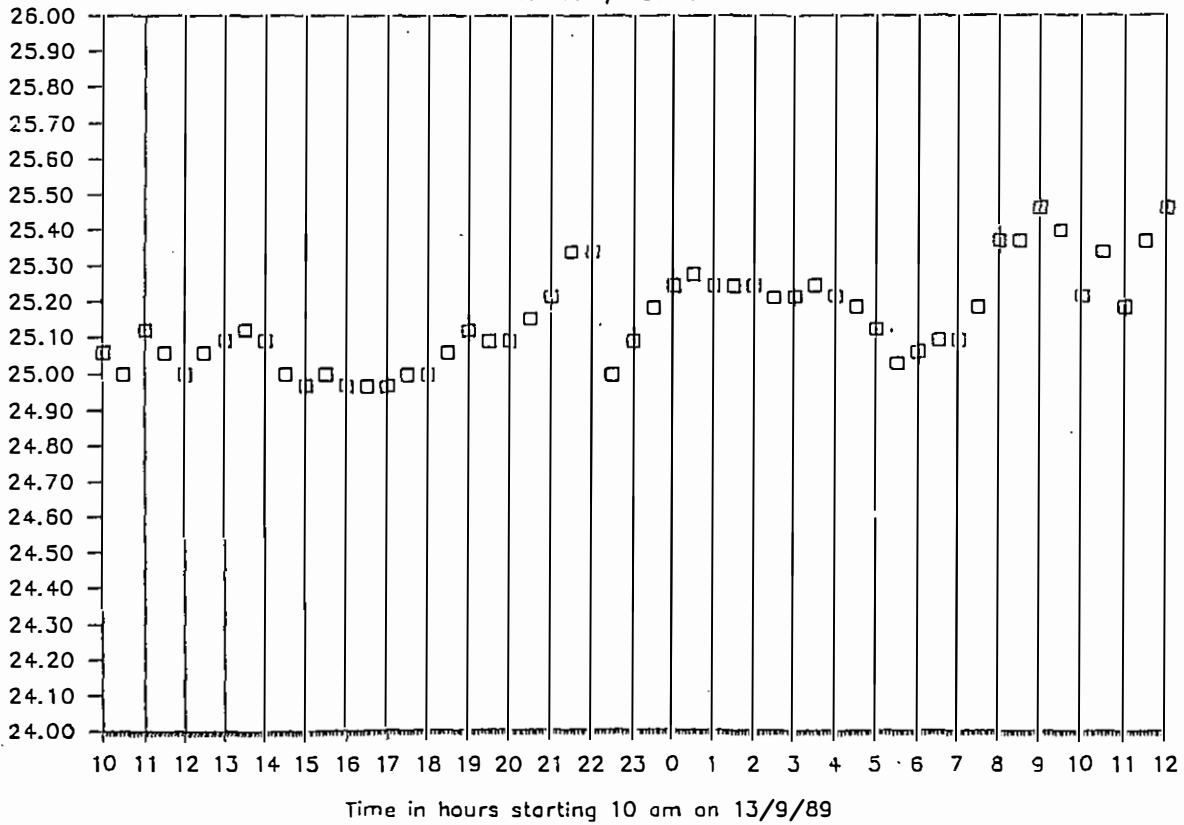


FIGURE 5

Levuka site B3

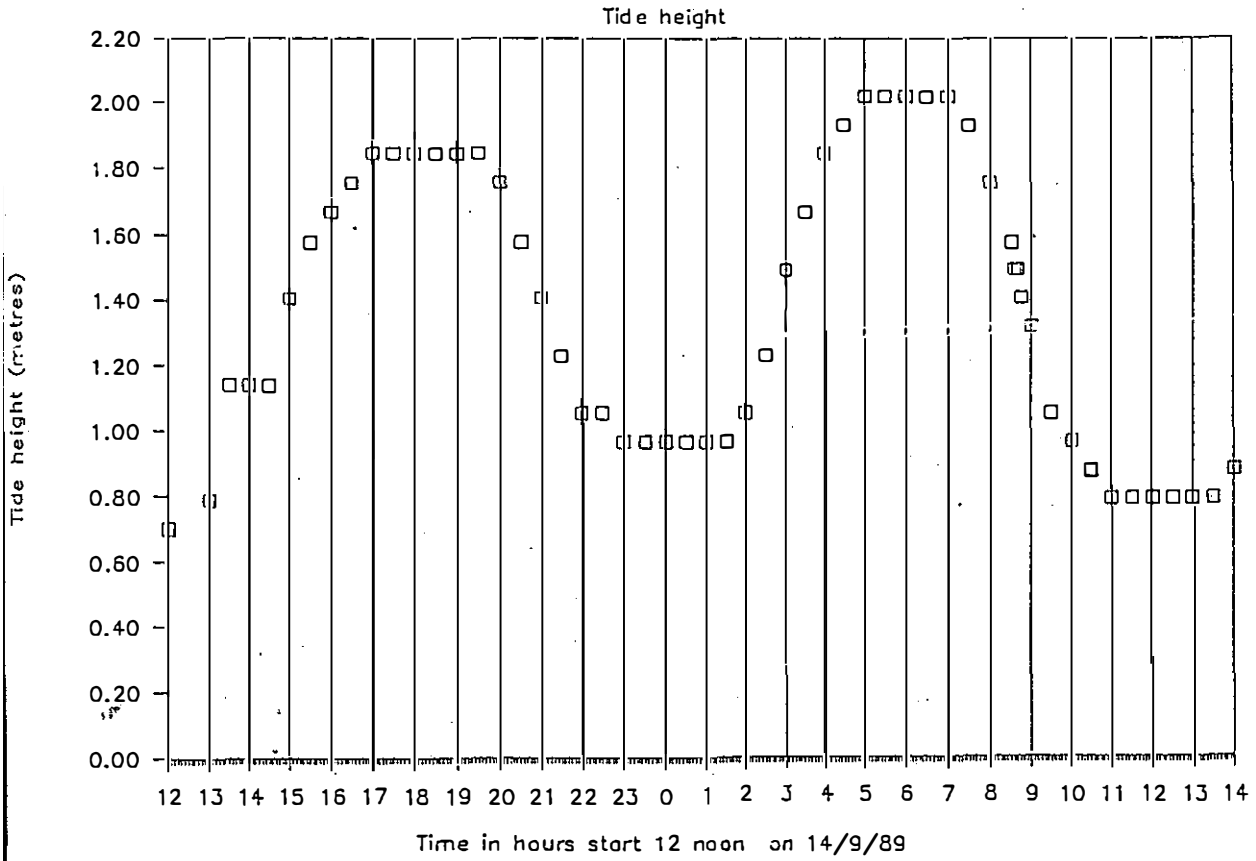


FIGURE 6

Levuka site B3

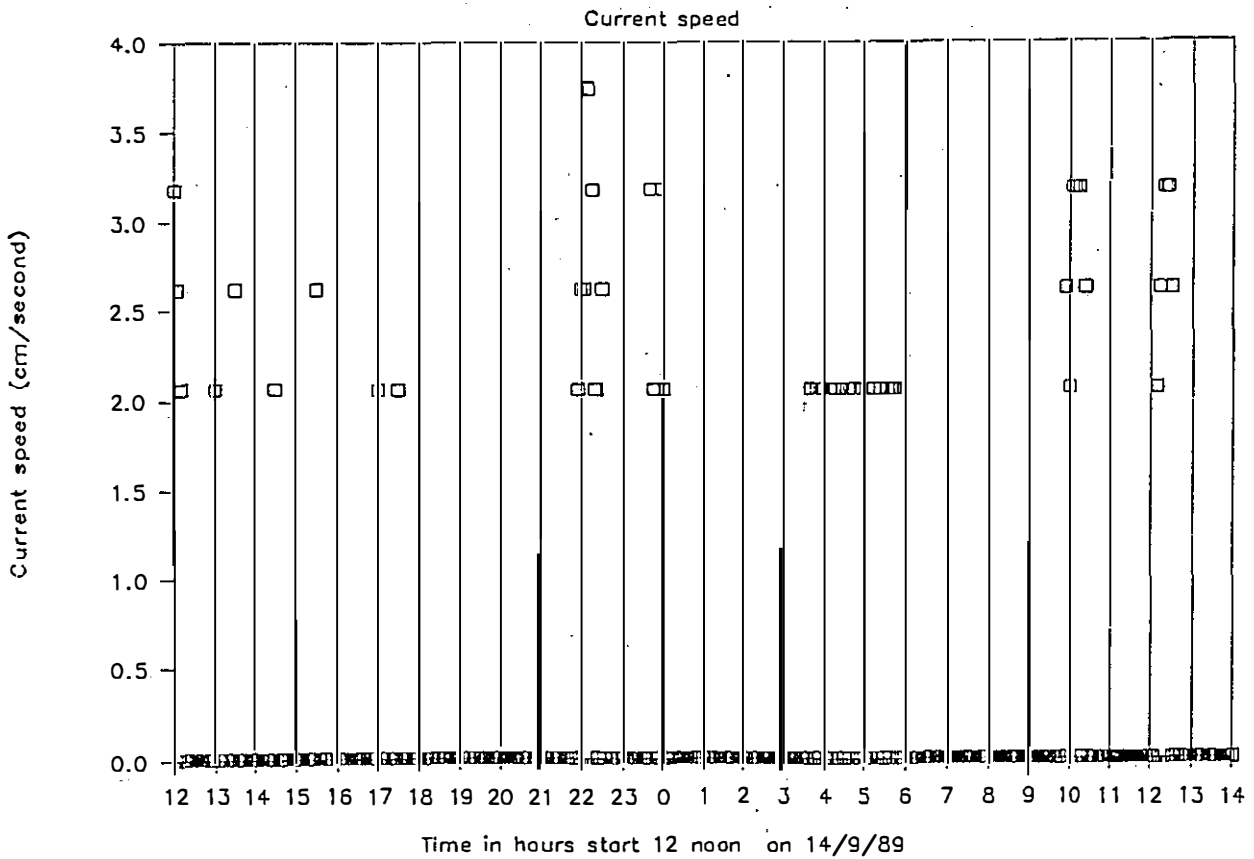


FIGURE 7

Levuka site B3

Current direction

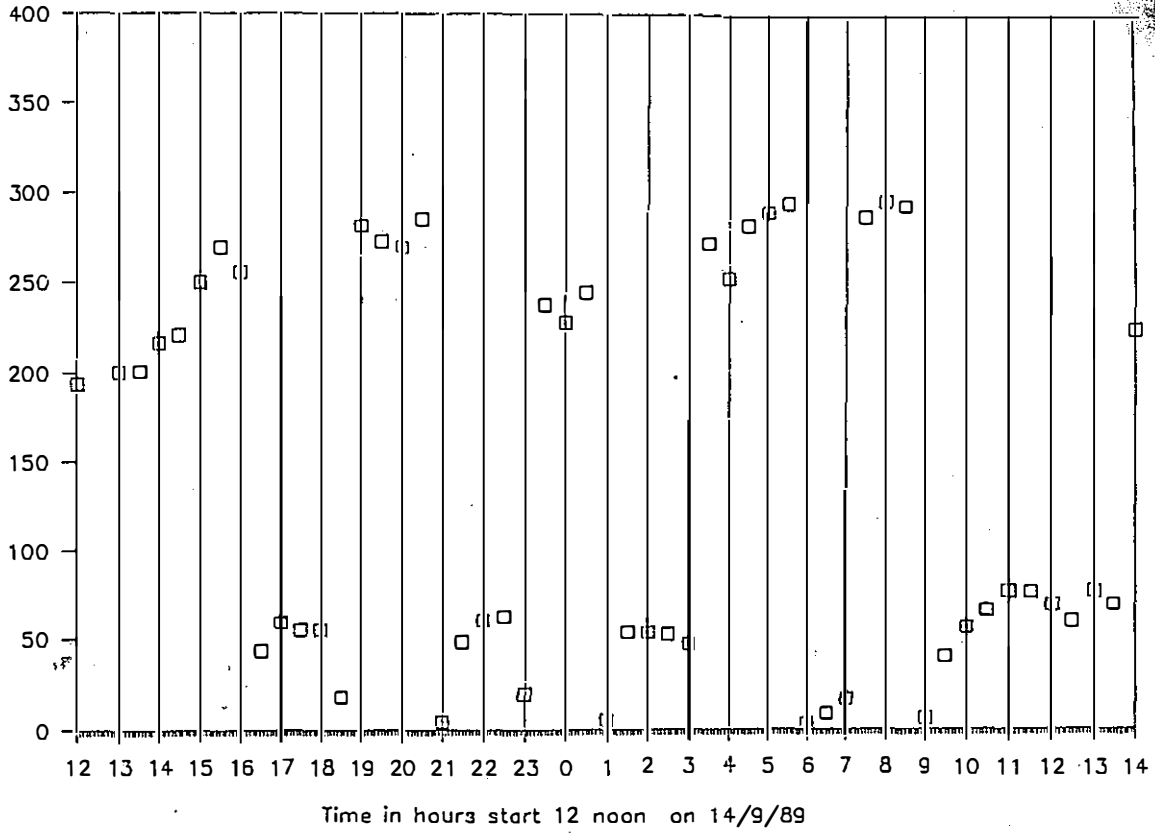


FIGURE 8

Levuka site B3

Water temperature

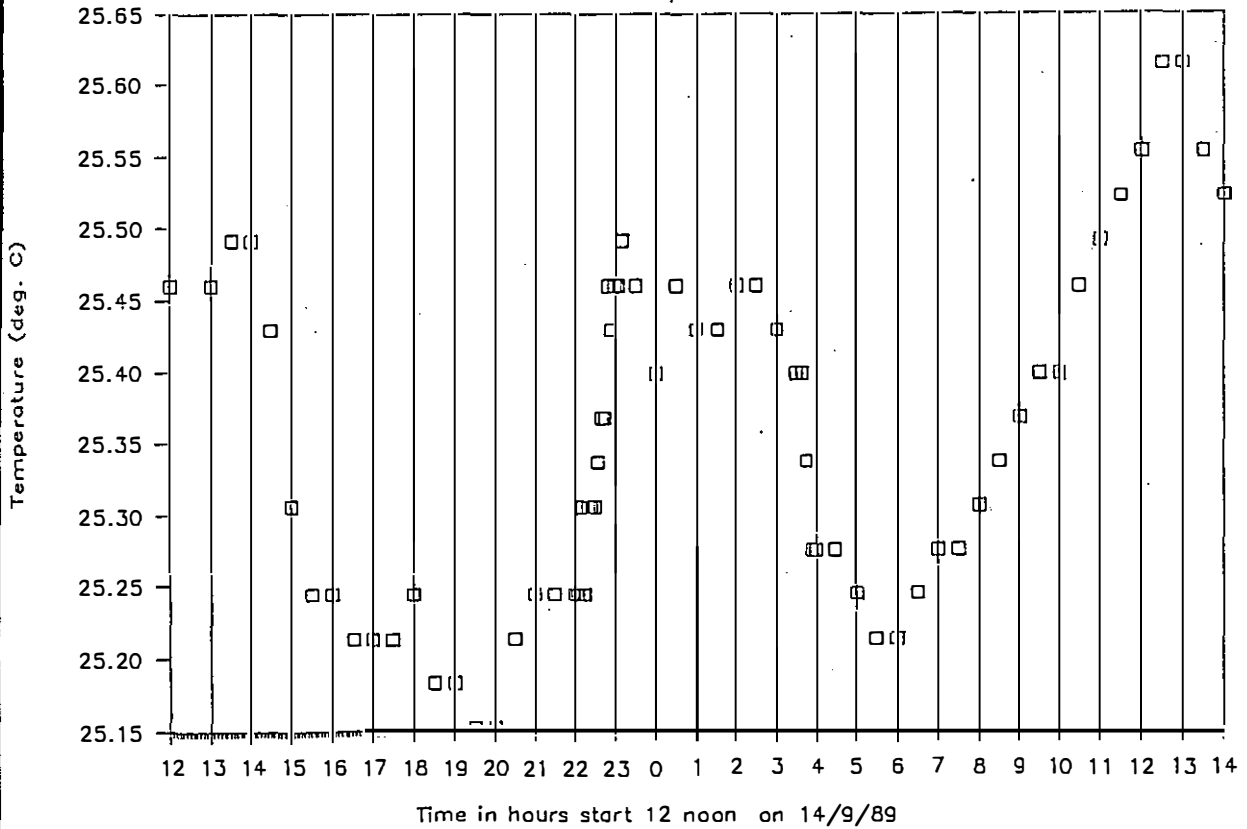


FIGURE 9

APPENDIX A

Zobell J-Z Sampler : This sampler described by Zobell in 1941 (4) was designed for deep sea sampling but is also used in fresh waters. Figure 10 shows its general appearance. it has a metal frame (A), a heavy metal messenger (B), a sealed glass tube (C) attached to a rubber tube (D), and a sterile 350 ml glass bottle (E). The messenger (B) is released at the surface when the sampler reaches the desired depth, and breaks the glass tubing (C) at a file mark. The bent rubber tubing (D) then straightens out and the water is drawn in several inches from the sampler. A partial vacuum created by autoclaving of the sealed unit draws the water into the bottle.

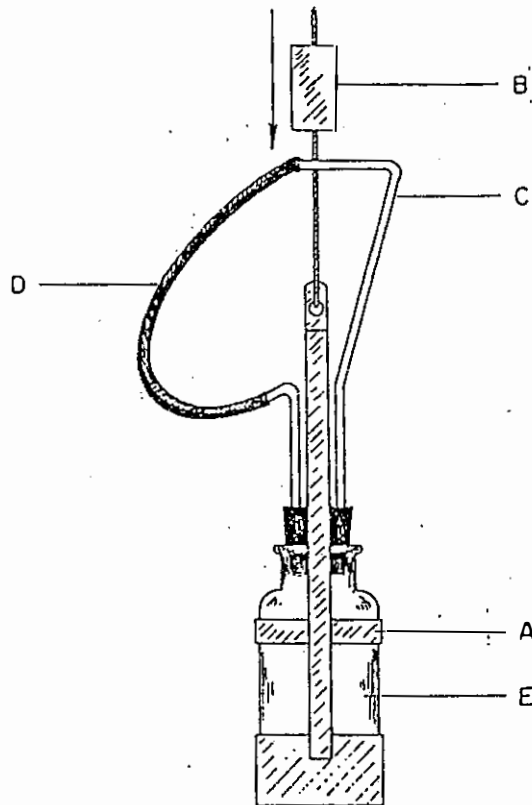


FIGURE 8 : Zobell J-Z Sampler. (A) metal frame, (B) messenger, (C) glass tube, (D) rubber tube and (E) sterile sample bottle.

The Current Meter

The specifications of the recording current meter are as follows :

MEASURING SYSTEM:

Self balancing bridge with sequential measuring of six channels and recording on magnetic tape. A ten bit binary word is used for each channel.
Measuring Speed: 4 seconds each channel.
The channels are:

1. REFERENCE:

This is a fixed reading that acts as a control on the performance of the RCM, and also as an identification of individual instruments.

2. TEMPERATURE:

Sensor Type: Thermistor (Fenwal GB32JM19)
Ranges:
Low: -2.46°C to 21.40°C (standard).
High: 10.08°C to 36.00°C.
Wide: -0.34°C to 32.17°C.
Arctic: -2.64°C to 5.62°C
Accuracy: ±0.05°C.
Resolution: 0.1% of range selected.
63% Response Time: 12 seconds.

3. CONDUCTIVITY: (optional)

Sensor Type: Inductive cell.
Range: 0 to 77 mmho/cm., (standard).
25 to 72 mmho/cm.
25 to 38 mmho/cm.
Resolution: 0.1% of range.
Calibration accuracy: ±0.025 mmho/cm.

CLOCK:

Type: Quartz Clock 2574.
Accuracy: Better than ±2 sec/day within 0°C to 20°C.
Sampling Intervals: 0.5, 1, 2, 5, 10, 15, 20, 30, 60 and 180 minutes, selected by interval selecting switch.
External Triggering: For calibration purposes, a six volts positive pulse to terminal on top end plate will activate the instrument.

RECORDING SYSTEM:

Type: Reel to reel 1/4 inch magnetic tape.
Coding: 10 bit binary words (short and long pulses) in serial form.
Storage Capacity: 10,000 samplings using 600 feet of magnetic tape on three inch reels.

TELEMETRY:

Acoustically:
By switching on and off carrier from acoustic transducer.
Frequency: 16384 Hz ±5 Hz.
Detection Range: Typically 800 meters with *Hydrophone Receiver 2247*.

By Cable:
5 volts negative, short and long pulses from terminal on top end plate may be used for real time readings and for calibration purposes by use of *Printer 2860* or similar readout equipment.

POWER:

Battery: 9 Volts, non-magnetic, NOVEL 5147.
Size: 63 x 50 x 80 mm.
Capacity: sufficient for 10,000 samplings.

MOORING:

Spindle designed for 15 mm. maximum diameter wire rope. Gimbaling permits 27° deviation between spindle and instrument.
Breaking load of spindle is 4700 kg.

The drag force on the RCM and the Viny Float is:

| | RCM | Viny Float Set 22098 |
|--------|---------|-------------------------|
| 1 knot | 0.50 kg | 1.50 kg |
| 2 " | 1.80 " | 2.00 " |
| 3 " | 4.10 " | 4.50 " |
| 4 " | 7.20 " | 7.60 " |
| 5 " | 8.10 " | 12.40 " |

4. PRESSURE: (optional)

Sensor Type: Bourdon tube driving a potentiometer.
Range: 0-100 PSI, 0-200 PSI, 0-500 PSI, 0-1000 PSI 0-3000 PSI and 0-9000 PSI. (The last range only for RCM5.)
Accuracy: ±1% of range
Resolution: 0.1% of range.

5. CURRENT DIRECTION:

Sensor Type: Magnetic compass with needle clamped on to potentiometer ring.
Resolution: 0.35°.
Accuracy:
±7.5° for current speed within 2.5 to 5 cm/sec., or 100 to 200 cm/sec.
±5° for current speed within 5 to 100 cm/sec.
Maximum Compass Tilt: 12° from horizontal.

6. CURRENT SPEED:

Principle: Rotor with magnetic coupling through instrument case. The number of rotations during the period between two samplings is counted by an electronic counter.
Range: 2.5 to 250 cm/sec.
Accuracy: ±1 cm/sec., or ±2% of the actual speed, whichever is greater.
Starting Velocity: 2.0 cm/sec.

EXTERNAL MATERIALS:

Pressure Case: Cu Ni Si alloy (05NISI1) and stainless acid proof steel, epoxy coated.
Vane: 8 mm PVC.
Other plastic parts: Polyamid and Polystyrene.
Other metal parts: Stainless acid proof steel and nickel plated bronze, epoxy coated.

| | RCM4S | RCM5S |
|-------------------|-------|-------|
| DEPTH CAPABILITY: | 2000m | 6000m |

NET WEIGHT:

| | in air | in water |
|----------------|--------|----------|
| Recording Unit | 13.7kg | 9.2kg |
| Vane Assembly | 12.9kg | 8.1kg |

DIMENSIONS:

| | RCM4S | RCM5S |
|------------------------|--------------|-------|
| Recording Unit: height | 510mm | 535mm |
| diameter | 128mm | |
| Overall length | 1370mm | |
| Overall height | 750mm | |
| Vane size | 370 x 1000mm | |

GROSS WEIGHT:

| | RCM4S | RCM5S |
|----------------|--------|--------|
| Recording Unit | 19.1kg | 21.0kg |
| Vane Assembly | 20.6kg | 21.1kg |

PACKING:

| | |
|--------------------------|---------------------|
| Recording Unit: | |
| Plywood instrument case, | 190 x 230 x 610mm |
| Vane Assembly: | |
| Plywood case | 155 x 400 x 1020 mm |

SPARES:

A set of recommended spares is delivered with each instrument. (rotor, bearings, O-rings etc.)

WARRANTY:

One year against faulty materials and workmanship.

APPENDIX B

DROUGUE PATHS

APPENDIX C

Tide Tables for Suva Harbour 1989

AUGUST

| Time | m | Time | m |
|---------|------|---------|------|
| 1 0553 | 1.63 | 16 0522 | 1.62 |
| 1227 | 0.13 | 1157 | 0.16 |
| Tu 1835 | 1.45 | W 1804 | 1.48 |
| 2 0029 | 0.38 | 17 0001 | 0.34 |
| 0639 | 1.63 | 0608 | 1.68 |
| W 1310 | 0.14 | Th 1238 | 0.10 |
| ☉ 1919 | 1.37 | ○ 1846 | 1.57 |
| 3 0114 | 0.37 | 18 0049 | 0.28 |
| 0723 | 1.60 | 0655 | 1.71 |
| Th 1351 | 0.16 | F 1320 | 0.07 |
| 1958 | 1.48 | 1930 | 1.64 |
| 4 0158 | 0.38 | 19 0137 | 0.23 |
| 0805 | 1.56 | 0742 | 1.71 |
| F 1429 | 0.21 | Sa 1404 | 0.07 |
| 2037 | 1.47 | 2015 | 1.69 |
| 5 0242 | 0.40 | 20 0227 | 0.20 |
| 0846 | 1.50 | 0832 | 1.67 |
| Sa 1507 | 0.27 | Su 1449 | 0.10 |
| 2115 | 1.45 | 2101 | 1.70 |
| 6 0325 | 0.43 | 21 0319 | 0.20 |
| 0925 | 1.42 | 0924 | 1.60 |
| Su 1545 | 0.35 | M 1536 | 0.19 |
| 2155 | 1.43 | 2153 | 1.68 |
| 7 0410 | 0.48 | 22 0416 | 0.22 |
| 1007 | 1.34 | 1023 | 1.51 |
| M 1623 | 0.42 | Tu 1627 | 0.27 |
| 2235 | 1.40 | 2251 | 1.63 |
| 8 0457 | 0.49 | 23 0513 | 0.26 |
| 1055 | 1.26 | 1129 | 1.42 |
| Tu 1702 | 0.49 | W 1723 | 0.37 |
| 2322 | 1.38 | 2353 | 1.58 |
| 9 0544 | 0.51 | 24 0617 | 0.30 |
| 1151 | 1.20 | 1241 | 1.36 |
| W 1747 | 0.55 | Th 1825 | 0.46 |
| 10 0015 | 1.36 | 25 0059 | 1.55 |
| 0638 | 0.51 | 0725 | 0.32 |
| Th 1258 | 1.16 | F 1351 | 1.33 |
| ☾ 1838 | 0.59 | 1934 | 0.51 |
| 11 0112 | 1.36 | 26 0204 | 1.54 |
| 0737 | 0.50 | 0836 | 0.32 |
| F 1401 | 1.15 | Sa 1457 | 1.34 |
| 1935 | 0.60 | 2043 | 0.51 |
| 12 0206 | 1.38 | 27 0304 | 1.55 |
| 0839 | 0.46 | 0941 | 0.29 |
| Sa 1500 | 1.18 | Su 1553 | 1.37 |
| 2036 | 0.59 | 2146 | 0.49 |
| 13 0258 | 1.42 | 28 0357 | 1.57 |
| 0936 | 0.40 | 1035 | 0.25 |
| Su 1552 | 1.23 | M 1644 | 1.41 |
| 2132 | 0.55 | 2240 | 0.45 |
| 14 0349 | 1.48 | 29 0448 | 1.59 |
| 1028 | 0.32 | 1122 | 0.23 |
| M 1638 | 1.30 | Tu 1729 | 1.46 |
| 2228 | 0.49 | 2327 | 0.42 |
| 15 0437 | 1.55 | 30 0534 | 1.60 |
| 1113 | 0.24 | 1204 | 0.21 |
| Tu 1722 | 1.36 | W 1810 | 1.49 |
| 2313 | 0.42 | 31 0011 | 0.39 |
| | | 0618 | 1.59 |
| | | Th 1243 | 0.22 |
| | | ☉ 1848 | 1.51 |

SEPTEMBER

| Time | m | Time | m |
|---------|------|---------|------|
| 1 0053 | 0.38 | 16 0025 | 0.21 |
| 0657 | 1.56 | 0629 | 1.73 |
| F 1320 | 0.25 | Sa 1248 | 0.10 |
| 1924 | 1.52 | 1857 | 1.77 |
| 2 0133 | 0.38 | 17 0116 | 0.15 |
| 0727 | 1.52 | 0720 | 1.72 |
| Sa 1354 | 0.30 | Su 1333 | 0.11 |
| 1958 | 1.52 | 1944 | 1.80 |
| 3 0212 | 0.39 | 18 0206 | 0.12 |
| 0813 | 1.46 | 0812 | 1.67 |
| Su 1427 | 0.36 | M 1420 | 0.17 |
| 2032 | 1.50 | 2033 | 1.78 |
| 4 0250 | 0.41 | 19 0300 | 0.13 |
| 0850 | 1.39 | 0910 | 1.59 |
| M 1500 | 0.42 | Tu 1510 | 0.26 |
| 2107 | 1.47 | 2128 | 1.72 |
| 5 0329 | 0.43 | 20 0355 | 0.18 |
| 0931 | 1.33 | 1010 | 1.50 |
| Tu 1536 | 0.49 | W 1604 | 0.37 |
| 2145 | 1.43 | 2228 | 1.64 |
| 6 0412 | 0.46 | 21 0454 | 0.24 |
| 1016 | 1.26 | 1118 | 1.42 |
| W 1616 | 0.55 | Th 1704 | 0.47 |
| 2231 | 1.39 | 2333 | 1.57 |
| 7 0459 | 0.49 | 22 0558 | 0.31 |
| 1111 | 1.20 | 1229 | 1.37 |
| Th 1701 | 0.60 | F 1812 | 0.54 |
| 2325 | 1.36 | | |
| 8 0553 | 0.51 | 23 0041 | 1.52 |
| 1217 | 1.17 | 0709 | 0.35 |
| F 1756 | 0.65 | Sa 1338 | 1.36 |
| | | 1926 | 0.57 |
| 9 0027 | 1.35 | 24 0147 | 1.51 |
| 0655 | 0.51 | 0818 | 0.37 |
| Sa 1324 | 1.17 | Su 1440 | 1.38 |
| 1859 | 0.66 | 2034 | 0.56 |
| 10 0127 | 1.38 | 25 0246 | 1.51 |
| 0759 | 0.48 | 0919 | 0.36 |
| Su 1426 | 1.21 | M 1534 | 1.42 |
| 2005 | 0.64 | 2134 | 0.53 |
| 11 0225 | 1.43 | 26 0341 | 1.53 |
| 0901 | 0.42 | 1010 | 0.34 |
| M 1518 | 1.28 | Tu 1621 | 1.46 |
| 2104 | 0.58 | 2224 | 0.49 |
| 12 0317 | 1.50 | 27 0428 | 1.54 |
| 0952 | 0.35 | 1055 | 0.33 |
| Tu 1604 | 1.38 | W 1702 | 1.50 |
| 2157 | 0.49 | 2309 | 0.45 |
| 13 0404 | 1.58 | 28 0513 | 1.54 |
| 1038 | 0.26 | 1134 | 0.33 |
| W 1648 | 1.49 | Th 1740 | 1.54 |
| 2248 | 0.40 | 2351 | 0.41 |
| 14 0452 | 1.65 | 29 0554 | 1.52 |
| 1122 | 0.18 | 1210 | 0.34 |
| Th 1730 | 1.60 | F 1815 | 1.56 |
| 2336 | 0.30 | | |
| 15 0540 | 1.71 | 30 0031 | 0.39 |
| 1204 | 0.12 | 0634 | 1.49 |
| F 1812 | 1.70 | Sa 1243 | 0.37 |
| | | ☉ 1846 | 1.56 |